


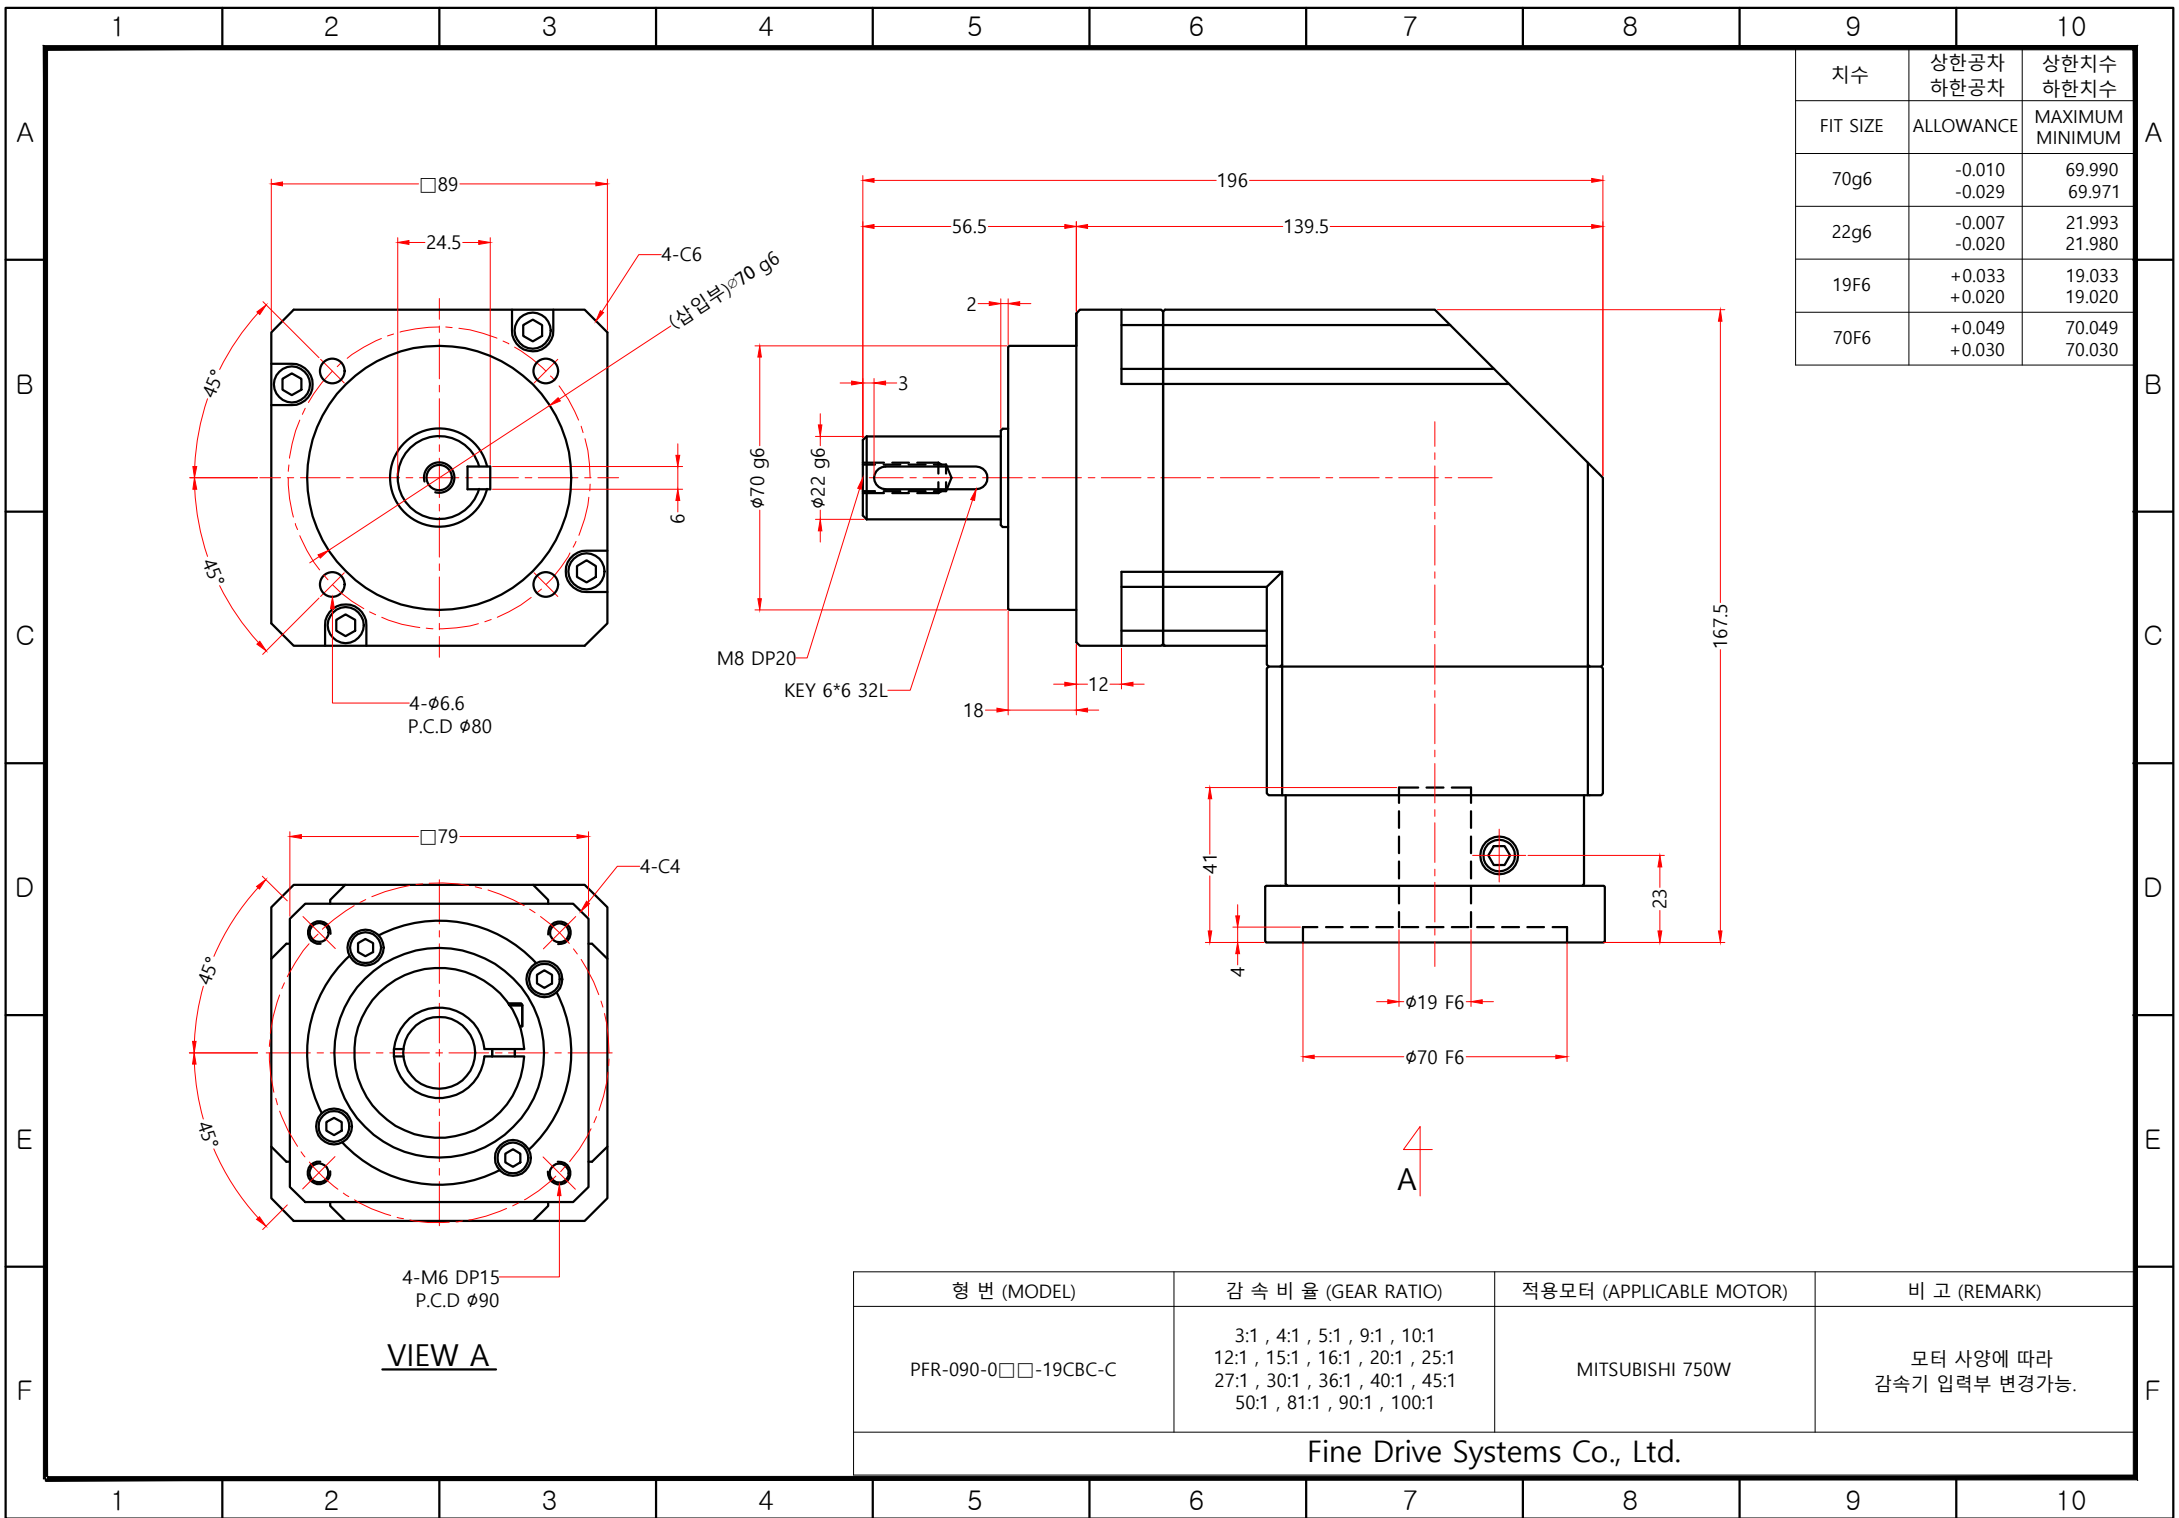

| 치수       | 상한공차<br>하한공차     | 상한치수<br>하한치수       |
|----------|------------------|--------------------|
| FIT SIZE | ALLOWANCE        | MAXIMUM<br>MINIMUM |
| 70g6     | -0.010<br>-0.029 | 69.990<br>69.971   |
| 22g6     | -0.007<br>-0.020 | 21.993<br>21.980   |
| 19F6     | +0.033<br>+0.020 | 19.033<br>19.020   |
| 70F6     | +0.049<br>+0.030 | 70.049<br>70.030   |

| 형 번 (MODEL)         | 감 속 비 율 (GEAR RATIO)                                                                                                               | 적용모터 (APPLICABLE MOTOR) | 비 고 (REMARK)               |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------------------------|
| PFR-090-0□□-19CBC-C | 3:1 , 4:1 , 5:1 , 9:1 , 10:1<br>12:1 , 15:1 , 16:1 , 20:1 , 25:1<br>27:1 , 30:1 , 36:1 , 40:1 , 45:1<br>50:1 , 81:1 , 90:1 , 100:1 | MITSUBISHI 750W         | 모터 사양에 따라<br>감속기 입력부 변경가능. |

Fine Drive Systems Co., Ltd.